


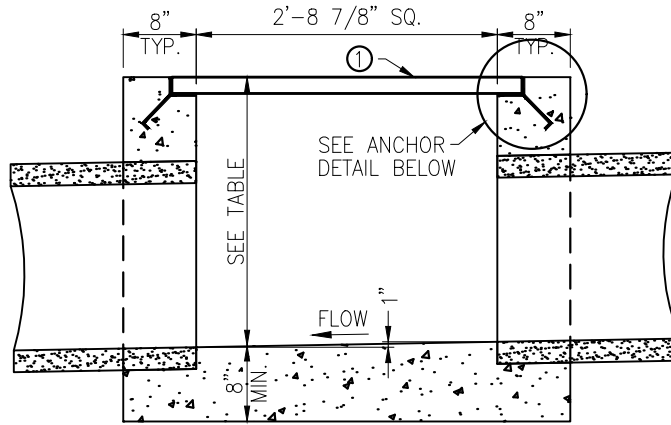

TYPICAL SECTION

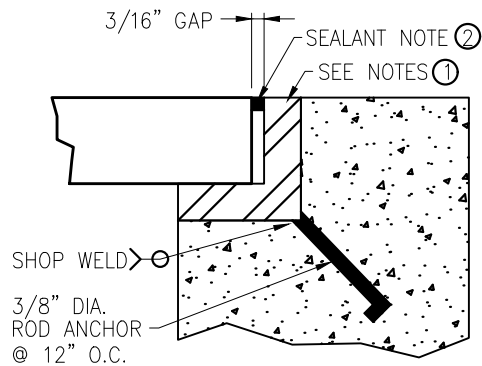


TABLE	
PIPE SIZE	MIN. DEPTH
12"	1'-9"
15"	2'-1"
18"	2'-4"
24"	2'-10"

ANCHOR DETAIL

NOTES:

1. NEENAH R-4884-A WITH L 2" x 2" x 1/4" ANGLE IRON FRAME OR APPROVED EQUAL. (OUTSIDE RIGHT-OF-WAY ONLY)
2. POLYURETHANE VULKEM SEALANT BY MAMECO INTERNATIONAL, INC. OR APPROVED EQUAL.
3. ALL CONCRETE SHALL BE CLASS "A".
4. DESIGNED FOR A MINIMUM OF H-25 LOADING.
5. DEPTHS GREATER THAN 4'-0" REQUIRE #4, GR. 60, REINFORCING BARS ON 12" CENTERS EACH WAY IN BOTH WALLS AND BASE.

CATCH BASIN

N.T.S